



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04B 1/707	A2	(11) International Publication Number: WO 00/36761 (43) International Publication Date: 22 June 2000 (22.06.00)
--	-----------	---

(21) International Application Number: PCT/US99/29504

(22) International Filing Date: 14 December 1999 (14.12.99)

(30) Priority Data:

60/112,299	14 December 1998 (14.12.98)	US
60/116,284	19 January 1999 (19.01.99)	US
60/125,418	22 March 1999 (22.03.99)	US
60/129,177	14 April 1999 (14.04.99)	US

(71) Applicant (for all designated States except US): INTERDIGITAL TECHNOLOGY CORPORATION [US/US]; Suite 527, 300 Delaware Avenue, Wilmington, DE 19801 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DICK, Stephen, G. [US/US]; 61 Bobann Drive, Nesconset, NY 11767 (US). DENNEAN, Charles [US/US]; 53 Vermont Street, Melville, NY 11747 (US). ZEIRA, Eldad [US/US]; 8 Old Oak Road, Trumbull, CT 06611 (US). PAN, Jung-Lin [-/US]; 31 Oneida Avenue, South Setauket, NY 11720 (US). SHIN, Sung-Hyuk [KR/US]; 1531 8th Street, Fort Lee, NJ 07024 (US). ZEIRA, Ariela [US/US]; 8 Old Oak Road, Trumbull, CT 06611 (US).


(74) Agents: VOLPE, Anthony, S. et al.; Volpe and Koenig, P.C., Suite 400, One Penn Center, 1617 John F. Kennedy Boulevard, Philadelphia, PA 19103 (US).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: RANDOM ACCESS CHANNEL PREAMBLE DETECTION

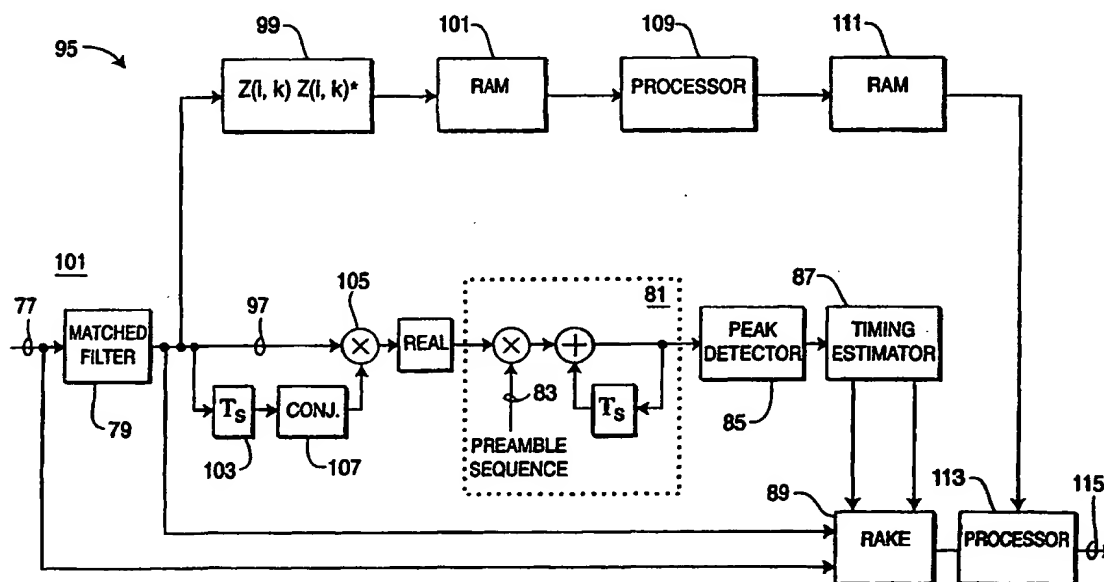

(57) Abstract

The present invention relates to a detector that detects a transmitted digital signature using the energy output from a matched filter. The energies are tabulated according to an anticipated signature pattern for variable transmission distances. The tabulation accounts for expected round trip transmission delays and allows processing of the accumulated symbols to derive a correct signature whether coherent or non-coherent signature coding is used and multiple Doppler channels are present.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

RANDOM ACCESS CHANNEL PREAMBLE DETECTION

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates generally to transmission systems and methods for binary modulated signals. More specifically, the invention relates to a CDMA transmission system for transmitting a modulated signal in a mobile communications environment where transmitting range varies.

Description of the Prior Art

A communication system has one principle function, to transmit information from a source to a destination. The information generated by the source is typically an electrical signal that changes with time.

The information signal is transmitted from the source to the destination over an appropriate medium, usually referred to as a channel. One method of altering the information signal to match the characteristics of the channel is referred to as modulation. The recovery of the information-bearing signal is called demodulation. The demodulation process converts the transmitted signal using the logical inverse of the modulation process. If the transmission channel were an ideal medium, the signal at the destination would be the same as at the source. However, the reality is that during the transmission process, the signal undergoes many transformations which induce distortion. A receiver at the destination must recover the original information by removing all other effects.

-2-

Most communications currently rely upon the conversion of an analog source into a digital domain for transmission and ultimately reconversion to analog form depending upon the type of information conveyed. The simplest digital representation is where the information in any bit time is a binary value, either a 1 or a 0. To extend the possible range of values that the information can be, a symbol is used to represent more than two possible values. Ternary and quaternary symbols take on three and four values respectively. The varying values are represented by integers, positive and negative, and are usually symmetric. The concept of a symbol allows a greater degree of information since the bit content of each symbol dictates a unique pulse shape. Depending upon the number of levels of a symbol, an equal number of unique pulse or wave shapes exist. The information at the source is converted into symbols which are modulated and transmitted through the channel for demodulation at the destination.

The normal processes of a communication system affect the information in a calculable and controllable manner. However, during the transmission from a source to a destination, a component that cannot be calculated is noise. The addition of noise in a digital transmission corrupts the signal and increases the probability of errors. Other signal corruptions that manifest themselves are multipath distortions due to natural terrain and manmade structures, and distances the signals travel which affect signal timing. The communication system needs to define the predictable transformations that the information signal encounters and during reception of the

information the receiver must possess the means to analyze the predictable transformations that have occurred.

A simple binary transmission system could use a positive pulse for a logical 1 and a negative pulse for a logical 0, with rectangular pulse shapes transmitted by the source. The pulse shape received at the destination undergoes the aforementioned transformations including noise and other distortions.

To minimize the probability of error, the response of a filter used at the receiver is matched to the transmitter pulse shape. One optimal receiver, known as a matched filter, can easily determine whether a transmitted pulse shape is a logical 1 or 0 and is used extensively for digital communications. Each matched filter is matched to a particular pulse shape generated by the transmitter corresponding to a symbol. The matched filter is sampled at the symbol rate to produce an output that correlates the input pulse shape with the response of the filter. If the input is identical to the filter response, the output will produce a large value representing the total energy of the signal pulse. The output usually is a complex quantity that is relative to the input. The optimum performance of the matched filter depends on a precise replica of the received signal pulses which requires accurate phase synchronization. Phase synchronization can easily be maintained with the use of a phase-locked loop (PLL). Pulse synchronization, however, is a problem for matched filters. If the pulses are not time-aligned to one symbol time, intersymbol interference (ISI) appears.

An example prior art communication system is shown in **Figure 1**. The system employs a technique known as code division multiplexing, or more commonly, as code-division multiple access or CDMA.

CDMA is a communication technique in which data is transmitted within a broadened band (spread spectrum) by modulating the data to be transmitted with a pseudo-noise signal. The data signal to be transmitted may have a bandwidth of only a few thousand Hertz distributed over a frequency band that may be several million Hertz. The communication channel may be used simultaneously by m independent subchannels. For each subchannel, all other subchannels appear as noise.

As shown, a single subchannel of a given bandwidth is mixed with a unique spreading code which repeats a predetermined pattern generated by a wide bandwidth, pseudo-noise (pn) sequence generator. These unique user spreading codes are typically orthogonal to one another such that the cross-correlation between the spreading codes is approximately zero. A data signal is modulated with the pn sequence to produce a digital spread spectrum signal. A carrier signal is then modulated with the digital spread spectrum signal, to establish a forward-link, and transmitted. A receiver demodulates the transmission and extracts the digital spread spectrum signal. The transmitted data is reproduced after correlation with the matching pn sequence. When the spreading codes are orthogonal to one another, the received signal can be correlated with a particular user signal related to the particular spreading code such that only the desired user signal related to the particular

-5-

spreading code is enhanced while the other signals for all other users are not enhanced. The same process is repeated to establish a reverse-link.

If a coherent modulation technique such as phase shift keying (PSK) is used for a plurality of subscriber units, whether stationary or mobile, a global pilot is continuously transmitted by the base station for synchronizing with the subscriber units. The subscriber units synchronize with the base station at all times and use the pilot signal information to estimate channel phase and magnitude parameters.

For the reverse-link, a common pilot signal is not feasible. For initial acquisition by the base station to establish a reverse-link, a subscriber unit transmits a random access packet over a predetermined random access channel (RACH). The random access packet serves two functions. The first function is for initial acquisition when the subscriber unit is transmitting and the base station has to receive the transmission quickly and determine what is received. The RACH initiates the reverse-link to the base station. The second use of random access packets is for communicating lower data rate information rather than consuming a dedicated continuous voice communication channel. Small amounts of data such as credit card information are included in the data portion of the random access packet instead of call placing data. The information when sent to the base station can be forwarded to another communicating user. By using the random packet data portion to transport addressing and data, available air resources are not burdened and can be efficiently used for higher data rate communications.

A random access packet comprises a preamble portion and a data portion. The data may be transmitted in parallel with the preamble. In the prior art, the random access channel typically uses quadrature phase shift keying (QPSK) for the preamble and data.

The base station examines the received preamble for the unique spreading codes. Each symbol of the RACH preamble is spread with a pn sequence. Using matched filters, the base station searches continuously for those codes that correlate. The data portion contains instructions for a desired service. The base station demodulates the data portion to determine what type of service is requested such as a voice call, fax, *etc.* The base station then proceeds by allocating a specific communication channel for the subscriber unit to use for the reverse-link and identifying the spreading codes for that channel. Once the communication channel is assigned, the RACH is released for other subscriber units to use. Additional RACHs afford quicker base station acquisition by eliminating possible collisions between subscriber units simultaneously initiating calls.

Without a subscriber unit pilot signal providing pulse synchronization in the reverse-link, acquisition of the RACH from a mobile subscriber unit is difficult if a coherent coding technique such as PSK is used compounded with transmitting range ambiguity. Since a mobile subscriber unit is synchronized with the base station, the RACH preamble is transmitted at a predefined rate.

An example prior art preamble signature is defined by 16 symbols. A table of sixteen coherent RACH preamble signatures is shown in **Figure 2**. Since each

-7-

symbol is a complex quantity and has a pulse shape comprising 256 chips of the spreading pn sequence, each signature comprises 4096 chips. The complete RACH preamble signature is transmitted at a chipping rate of 4096 chips per millisecond or 0.244 chips per microsecond.

From the global pilot signal, each subscriber unit receives frame boundary information. Depending upon the distance from the base station to a subscriber unit, the frame boundary information suffers a forward-link transmission delay. A RACH preamble transmitted in the reverse direction suffers an identical transmission delay. Due to the propagation delay, the perceived arrival time of a RACH preamble at a base station is:

$$\Delta t = \frac{2 (\text{distance})}{C}, \text{ where } C = 3.0 \times 10^8 \text{ m/s.} \quad \text{Equation 1}$$

Due to this inherent delay, the range ambiguity for a subscriber unit varies according to distance. At 100m, the effect is negligible. At 30km, the delay may approach the transmission time of 4 symbols. Table 1 illustrates the effect of round trip propagation delay.

range (km)	round trip time (msec)	chip value	symbol interval
0	0	0	1
5	0.033	137	1
10	0.067	273	2
15	0.100	410	2

-8-

range (km)	round trip time (msec)	chip value	symbol interval
20	0.133	546	3
25	0.167	683	3
30	0.200	819	4

Table 1 - Effect of range ambiguity

The first column is the distance in km between a mobile subscriber unit and a given base station. The second column is the round trip propagation delay of the RF signal in milliseconds from the base station to a subscriber unit and back. The third column shows the chip clocking position of the matched filter at the base station with time 0 referenced at the start of a transmitted frame boundary. The value represents when a first chip is received from a subscriber unit referencing the beginning of a frame boundary. The fourth column shows the expected location of the first output of the matched filter which occurs after assembling 256 received chips; (reference being made at the start of a frame boundary). A symbol may be output during any one of the first four symbol intervals depending on subscriber unit distance.

Since the base station is not synchronized with the subscriber unit and does not have a carrier reference, the base station does not know where in a received chip sequence the beginning of a RACH preamble symbol begins. The matched filter must correlate a total of 256 chips corresponding to a valid symbol pulse shape. As one skilled in this art knows, as the chips are received, the matched filter assembles

-9-

256 chips to produce a first output representative of the pulse shape. Consecutive outputs from the matched filter are generated for each subsequently received chip.

The mobile subscriber unit transmits the preamble part first to access the RACH from the base station. One from among sixteen signatures is randomly selected and one from among five time-offsets is randomly chosen to account for the range ambiguity during transmission. The mobile subscriber unit constantly receives a frame boundary broadcast from the base station. To request a RACH, the mobile subscriber unit transmits a random burst with an $n \times 2\text{ms}$ time-offset (where $n = 0, 1, \dots, 4$) relative to the received frame boundary as shown in **Figure 3**. The time-offset (value of n) is chosen at random at each random access attempt.

Four received preamble signatures, a , b , c , and d are shown in **Figures 4a-d** received at the base station. Each signature arrives at one symbol duration (0.0625ms) later due to round trip delay, with each signature representing a different distance between the base station and mobile subscriber unit. Only sixteen consecutive symbols have signal components, the other matched filter outputs represent noise. It is known that range ambiguity will destroy the orthogonality among signatures and degrade performance. The possibility exists that the base station receiver could confuse any combination from a possible nineteen outputs from the matched filter as an incorrect signature.

Accordingly, there exists a need for a CDMA transmission and detection scheme that is accurate notwithstanding communication distance and the effects of Doppler.

-10-

SUMMARY OF THE INVENTION

The present invention relates to a detector that detects a transmitted digital signature using the energy output from a matched filter in conjunction with normal correlation detection. The energies are tabulated according to an anticipated signature pattern for variable transmission distances. The tabulation accounts for expected round trip transmission delays and allows processing of the accumulated symbols to derive a correct signature whether coherent or non-coherent signature coding is used and whether or not multiple Doppler channels are present. Alternative embodiments of the invention include new schemes for differentially encoding RACH preamble signatures.

Objects and advantages of the system and the method will become apparent to those skilled in the art after reading a detailed description of the preferred embodiment.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a simplified block diagram of a prior art CDMA communication system.

Figure 2 is a table of sixteen coherent RACH signatures.

Figure 3 is a timing diagram showing transmission timing for parallel RACH attempts.

Figure 4A is a timing diagram showing a 16 symbol RACH preamble signature received during the first symbol interval period.

-11-

Figure 4B is a timing diagram showing a 16 symbol RACH preamble signature received during the second symbol interval period.

Figure 4C is a timing diagram showing a 16 symbol RACH preamble signature received during the third symbol interval period.

Figure 4D is a timing diagram showing a 16 symbol RACH preamble signature received during the fourth symbol interval period.

Figure 5 is a detailed block diagram of a CDMA communication system.

Figure 6A is a prior art system diagram of a random access channel preamble detector.

Figure 6B is a random access channel preamble detector made in accordance with the present invention..

Figure 7A is a diagram of the symbol memory matrix.

Figure 7B is a flow diagram of the procedure for tentatively detecting preamble signatures.

Figure 7C is a flow diagram of the procedure for resolving range ambiguity.

Figure 8 is a table showing four possible combinations of received preamble signature symbols to resolve range ambiguity.

Figure 9 is a table showing the relationship between orthogonality and range ambiguity.

Figure 10 is a table of sixteen non-coherent RACH signatures.

Figure 11 is a system diagram of a non-coherent RACH preamble detector.

-12-

Figure 12A is a system diagram of a coherent RACH preamble detector correcting for multiple Doppler channels.

Figure 12B is a detailed diagram of a preamble correlator.

Figure 13 is an alternative embodiment of the present invention.

Figure 14 is the encoding rule for the alternative embodiment of the present invention.

Figure 15 is an uncoded sequence and its transformation into a differentially coded sequence.

Figure 16 is a transmitted signature of the sequences of **Figure 15**.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The preferred embodiment will be described with reference to the drawing figures where like numerals represent like elements throughout.

A CDMA communication system **25** as shown in **Figure 5** includes a transmitter **27** and a receiver **29**, which may reside in either a base station or a mobile subscriber unit. The transmitter **27** includes a signal processor **31** which encodes voice and nonvoice signals **33** into data at various rates, *e.g.* 8 kbps, 16 kbps, 32 kbps, 64 kbps or other rates as desired for the particular application. The signal processor **31** selects a rate in dependence upon the type of signal, service or in response to a set data rate.

By way of background, two steps are involved in the generation of a transmitted signal in a multiple access environment. First, the input data **33** which

-13-

can be considered a bi-phase modulated signal is encoded using a forward error-correction (FEC) encoder 35. For example, if a $R=1/2$ convolution code is used, the single bi-phase modulated data signal becomes bivariate or two bi-phase modulated signals. One signal is designated the in-phase channel I 41a. The other signal is designated the quadrature channel Q 41b. A complex number is in the form $a+bj$, where a and b are real numbers and $j^2=-1$. Bi-phase modulated I and Q signals are usually referred to as QPSK.

In the second step, the two bi-phase modulated data or symbols 41a, 41b are spread with a complex pseudo-noise (pn) sequence 43a, 43b. The QPSK symbol stream 41a, 41b is multiplied by a unique complex pn sequence 43a, 43b. Both the I and Q pn sequences 43a, 43b are comprised of a bit stream generated at a much higher rate, typically 100 to 200 times the symbol rate. The complex pn sequence 43a, 43b is mixed at mixers 42a, 42b with the complex-symbol bit stream 41a, 41b to produce the digital spread signal 45a, 45b. The components of the spread signal 45a, 45b are known as chips having a much smaller duration. The resulting I 45a and Q 45b spread signals are upconverted to radio frequency by mixers 46a, 46b, and are combined at the combiner 53 with other spread signals (channels) having different spreading codes, mixed with a carrier signal 51 to upconvert the signal to RF, and radiated by antenna 54 as a transmitted broadcast signal 55. The transmission 55 may contain a plurality of individual channels having different data rates.

-14-

The receiver 29 includes a demodulator 57a, 57b which downconverts the received revision of transmitted broadband signal 55 at antenna 56 into an intermediate carrier frequency 59a, 59b. A second down conversion at the mixers 58a, 58b reduces the signal to baseband. The QPSK signal is then filtered by the filters 61 and mixed at mixers 62a, 62b with the locally generated complex pn sequence 43a, 43b which matches the conjugate of the transmitted complex code. Only the original waveforms which were spread by the same code at the transmitter 27 will be effectively despread. All other received signals will appear as noise to the receiver 29. The data 65a, 65b is then passed to a signal processor 67 where FEC decoding is performed on the convolutionally encoded data.

After the signal has been received and demodulated, the baseband signal is at the chip level. Both the I and Q components of the signal are despread using the conjugate of the pn sequence used during spreading, returning the signal to the symbol level.

To establish a reverse-link from a mobile subscriber unit to a base station, the mobile subscriber unit transmits a random access packet transported on a RACH. The transmission of the RACH is similar to what was described except the RACH does not undergo FEC. There may also be more than one RACH employed in the communication system 25.

A table showing 16 possible coherent PSK coded RACH 71 preamble signatures 73 is shown in **Figure 2**. Each signature comprises 16 symbols. Each symbol A is a complex number $A=1+j$. A discussion of the coding methods and

-15-

complex numbers is beyond the scope of this disclosure and is known to those skilled in this art.

A prior art coherent RACH 71 detector 75 is shown in **Figure 6A**. After the receiver 29 demodulates the RACH 71 carrier, the demodulated signal 77 is input to a matched filter 79 for despread the RACH preamble 73. The output of the matched filter 79 is coupled to a preamble correlator 81 for correlating the RACH preamble 73 with a known preamble pn sequence representing the preamble code 83. The output of the preamble correlator 81 will have peaks 85 corresponding to the timing 87 of any received random access burst using the specific preamble code 83. The estimated timing 87 can then be used in an ordinary RAKE 89 combiner for the reception of the data part of the RACH 71 burst. Although this detector 75 may work well under ideal conditions with the coherent PSK coded preamble signatures 73 shown in **Figure 2**, its operation may be adversely affected due to range ambiguity and the presence of Doppler.

In a first embodiment of the present invention, non-coherent detection can be utilized. In this embodiment, the coherent RACH preamble signatures 73 shown in **Figure 2** are differentially encoded, (i.e., differential phase shift keyed (DPSK) processed). Accordingly, the coherent preamble signatures 73 are first translated into incoherent, DPSK coded signals prior to transmission, and then differentially decoded after reception.

-16-

The method of translating the coherent symbols into non-coherent symbols is performed in accordance with the following steps, (where i = rows and j = columns). First:

if $S_{old}(i,1) = -A$; multiply all j corresponding to i by -1. **Equation 2**

For example, for signature 4 ($i=4$) shown in **Figure 2**:

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
4	-A	A	-A	A	-A	-A	-A	-A	-A	A	-A	A	-A	A	A	A

multiply by -1

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
4	A	-A	A	-A	A	A	A	A	A	-A	A	-A	A	-A	-A	-A

After the first step, the old preamble signatures would consist of the original undisturbed signatures (1, 3, 5, 8, 9, 11, 12 and 13) and the signatures multiplied by -1 (2, 4, 6, 7, 10, 14, 15 and 16).

The second step of the translation process translates each consecutive symbol of a preamble signature 73:

$$S_{new}(i,j) = A \text{ if: } S_{old}(i,j) = S_{new}(i,j-1) \quad \textbf{Equation 3}$$

$$S_{new}(i,j) = -A \text{ if: } S_{old}(i,j) \neq S_{new}(i,j-1) \quad \textbf{Equation 4}$$

Continuing with the example, for signature 4 ($i=4$):

$$S_{old}(4,2) \neq S_{new}(4, 2-1)$$

$$-A \neq A$$

-17-

therefore; $S_{\text{new}}(4, 2) = -A$

The remainder of the DPSK coding is performed for each consecutive symbol of a given preamble signature 73. The process translates all 16 preamble signatures 73 into the differential preamble signatures 97 shown in Figure 10. The DPSK translation may be calculated and loaded into firmware as part of the mobile subscriber unit or may be calculated when initiating a call depending upon the sophistication of the base station receiver. For the DPSK preamble signatures, the same process as hereinbefore described for coherent processing may be performed except that the received signal must be recovered by differential decoding before correlating with the preamble signatures.

A RACH detector 101 made in accordance with present invention 95 is shown in Figure 6B. As previously described with reference to the prior art receiver 75, the received RACH 77 is demodulated and coupled to the input of the matched filter 79. The output of the matched filter 79 is coupled to the RAKE 89, to a time delay 103 and a first mixer 105. Each received signature 97 is delayed by one symbol length, which is 256 chips. The output of the time delay 103 is coupled to conjugate processor 107 which converts the received symbol to its complex conjugate. The output of the complex conjugate processor 107 is coupled to the first mixer 105 where the real part of the complex number is selected 106 and multiplied by the signature symbol and output to the preamble correlator 81. The preamble correlator 81 correlates a possible signature with a sequence of outputs. This sum is compared to a threshold in the peak detector 85 and if it exceeds the threshold by

-18-

the end of the sixteenth symbol, it is determined that a signature has been detected. Since there are 16 computations, one for each signature, there may be more than one accumulation that exceeds its threshold for a given sample time. In this case, the accumulation with the largest value is selected as correct. The estimated timing 87 can then be used in an ordinary RAKE 89 combiner for the reception of the data part of the RACH 71 burst.

In accordance with a second embodiment of the present invention, the energy from each output of the RACH detector matched filter 79 is computed. Although the matched filter 79 is typically sampled at the chipping rate, it may be oversampled at twice or four times the chipping rate, (or even higher). In this embodiment, the chipping rate is 4.096 million chips per second, or one chip every $0.244\mu\text{s}$.

Shown in Figure 7A is a memory matrix 101 stored in RAM 100 where the value of the energy computed for each symbol output from the matched filter 79 is stored. The matrix 101 is arranged to store all possible delayed symbol values corresponding to base station to subscriber unit transmission distances ranging from 100m to 30km. The matrix 101 consists of 256 rows (0-255) 102 and 19 columns (0-18) 104 representing the total number of chips transmitted during a RACH preamble signature. If the subscriber unit were located adjacent to the base station where propagation delay would be negligible, the first symbol would be output after 256 chips were received or at P(255,0). If the subscriber unit were located at 30km, the first symbol would be output after 819 chips were received or at approximately P(54,4). Regardless of transmission distance, every 256 chips later would produce

another symbol, and so on, thereby completing an entire row. Since sixteen symbols define a preamble signature, the matrix **101** allows for three additional symbol outputs to anticipate range ambiguity, (shown in **Figure 4**, as will be explained in greater detail hereinafter). Once the matrix **101** is populated, it includes all samples of interest for the mobile subscriber unit out to a range of 30 km.

Each output **97** from the matched filter **79** is a complex number:

$$z(ik) = x(ik) + jy(i,k); \text{ where } i = 0 \text{ to } 255 \text{ and } k=0 \text{ to } 18. \quad \text{Equation 5}$$

The value for instantaneous energy, which is the sum of the squares of real and imaginary parts of each output, is computed as:

$$P(i,k) = z(i,k) z(i,k)^* = x^2 + y^2, \quad \text{Equation 6}$$

and stored within the matrix **101**.

Because a preamble signature is from a set of 16 symbols, each with a pre-specified chip pattern, a match filter output is expected to produce a larger than average output 16 times, each larger value separated from the previous one by 256 chips. The combined output is the sum of the matched filter outputs speed by 256 chips. One problem that must be overcome is that the first matched filter output does not automatically occur within the first 256 chips. It can occur later, as shown in

Table 1, depending upon the distance between the mobile subscriber unit and the base station.

When a preamble signature is present, its corresponding matched filter outputs will fill 16 of the 19 elements of one of the 256 rows **102**. For each row, a complete preamble signature may be detected where the value of total energy summed for the row exceeds a predetermined threshold.

Referring to **Figure 7B**, the procedure **200** for tentatively detecting preamble signatures is shown. Once the matrix **101** is populated (**step 201**), the value of energy for each row is summed **109** and similarly stored (**step 202**). For those rows where the sum exceeds a predetermined threshold, the row is considered to be a "tentative detection". The sum for the first row is compared to a predetermined threshold (**step 204**) to determine if the sum exceeds the threshold (**step 206**). If so, the row is marked as a tentative detection (**step 208**). If each row has not been summed (**step 210**), the next row is retrieved (**step 212**) and the process is repeated (**steps 206-210**). Once all the rows have been summed, the range ambiguity on each tentative detection is resolved (**step 214**), (which will be described in greater detail hereinafter), and the candidates are output (**step 216**).

As indicated above, due to the location of the mobile subscriber unit, range ambiguity is introduced whereby the preamble signature may not occur for up to four symbols. This range ambiguity must be resolved. Accordingly, for each row marked as a tentative detection, the value of the energy of the 16 consecutive positions within that row which produce the highest sum must be determined. Due to range

-21-

ambiguity, four possible cases 1, 2, 3 and 4 are derived from a received version of a preamble signature. The four cases are shown in **Figure 8**. In this example, signature 1 was transmitted and assembled from nineteen received symbols, forming one row of the memory matrix **101**. For each case, sixteen consecutive symbols out of nineteen are correlated with each of the sixteen possible preamble signatures, resulting in 64 hypotheses. One of the 64 hypotheses will result in a signature having the greatest energy received. The greatest of the 64 hypotheses will occur in case 1 since case 1 has all consecutive symbols and does not include noise. Cases 2, 3 and 4 include symbols derived from noise components and will not correlate with one of the sixteen preamble signatures.

Referring to **Figure 7C**, the procedure **300** for resolving range ambiguity in accordance with the present invention is shown. As was described with reference to **Figure 8**, each row comprises 19 total positions. Referring back to **Figure 7C**, the values of the energy of the first 16 consecutive positions of a row considered to be a tentative detection are analyzed (**step 301**). The energy sum for the 16 positions is calculated (**step 302**) and then stored (**step 304**). If the sums of all positions within the row have not been calculated (**step 306**) the next 16 consecutive positions, corresponding to elements 2-17, are reviewed (**step 308**). The counter is then incremented (**step 310**) and the procedure is then repeated (**step 302-306**). Once the sums of all positions have been calculated, all of the sums are compared to determine if the 16 consecutive positions within the row that have the greatest sum (**step 312**). The system then outputs the value of the column (k) corresponding to the beginning

-22-

of the 16 consecutive positions having the greatest sum (step 314). This is a selected candidate. This procedure is repeated for each tentative detection.

The process described with reference to **Figure 7C** can be summarized in pseudo code as follows:

```

row i(i=0 to 255)
  sum(k)=0; k =0,1,2,3
  for k = 0 to 3, do
    sum(k) = sum(k) + P(i,n+k-1)
  next k

then;

  Select k for max sum(k)
  maxk=0
  max = sum(0)
  for k = 1 to 3
    if sum(k)>max then
      max=sum(k)
      maxk=k
  next k.

```

The selected candidates are compared with the output of a normal correlation detection process for coherent or incoherent PSK coding. The discussion of a

-23-

normal correlation detection process is beyond the scope of this application and is well known to those skilled in this art.

Referring to **Figure 9**, a table of the relationship between orthogonality and range ambiguity is shown. The first column is the signature with which a received signal correlates. The second through fifth columns are the correlation values of cases 1-4. The larger the correlation value, the better the received match to the received signal. A zero correlation value indicates the received symbol is orthogonal to the respective signature symbol. As can clearly be seen, orthogonality does not exist among the respective signatures for cases 2, 3 and 4.

The correlation values shown in **Figure 9** are calculated as:

$$\frac{100}{1024} \left| \bar{s}^{(1)} \bullet \bar{s}^{(k)H} \right|^2 = \frac{100}{1024} \left| \sum_{i=0}^{15} P_i^{(1)} \bullet P_{i+l}^{*(k)} \right|^2, k = 1, 2, \dots, 16; \quad \text{Equation 7}$$

where $k = 1$ for signature 1, $k = 2$ for signature 2, ... $k = 16$ for signature 16 and for case 1, $l = 0$; case 2, $l = 1$; case 3, $l = 2$; and case 4, $l = 3$. The value 1024 is derived by:

$$1024 = \left| \bar{s}^{(1)} \bullet \bar{s}^{(1)H} \right|^2, \text{ where } \bar{s}^{(1)} = \text{signature 1}, \quad \text{Equation 8}$$

and where

-24-

$$\vec{s}^{(1)} \bullet \vec{s}^{(i)H} = \left[\underbrace{A \ A \ A \ -A \ -A \ -A \ A \ -A \ -A \ A \ A \ -A \ A \ -A \ A \ A}_{16 \text{ symbols}} \right] \begin{bmatrix} A^* \\ A^* \\ A^* \\ -A^* \\ -A^* \\ -A^* \\ A^* \\ -A^* \\ -A^* \\ A^* \\ A^* \\ -A^* \\ A^* \\ A^* \\ A^* \end{bmatrix}$$

Equation 9

$$= 16 \times A \bullet A^*$$

$$= 16 \times (Hj)(1 - j)$$

$$= 16 \times 2$$

$$= 32$$

and $A =$

$$1 + j$$

$$A^* = \text{conjugate of } A \ (1 - j)$$

$$\text{therefore } 32^2 = 1024$$

A RACH detector 95 made in accordance with this embodiment of the present invention is shown in **Figure 11**. As previously described in the prior art receiver shown in **Figure 6**, the received RACH 77 is demodulated and coupled to the input of the matched filter 79. The output of the matched filter 79 is coupled to the RAKE 89, to a time delay unit 103, a first mixer 105, and a first processor 99. Each received preamble signature 97 is delayed by one symbol length T_s , which is 256 chips, in the delay unit 103. The output of the time delay unit 103 is coupled to conjugate processor 107 which converts the received symbol to its complex conjugate. The output of the complex conjugate processor 107 is coupled to the first

-25-

mixer 105 where the real part of the complex number is multiplied by the preamble signature symbol and output to the preamble correlator 81. The preamble correlator 81 correlates a possible signature with a sequence of outputs based on the symbol sequence. This sum is compared to a threshold, and if it exceeds the threshold by the end of the sixteenth symbol, a signature is detected. Since there are 16 computations, one for each signature, there may be more than one accumulation that exceeds its threshold for a given sample time. In that case, the accumulation with the largest value is selected as correct.

Contemporaneous with the above-described signature correlation, the matched filter 79 output 97 is input to the first processor 99 which computes the value of the energy for each symbol output. For each energy value computed, it is stored in the memory matrix 101. As previously described, after the energy values have been computed for a row of 19 symbols, a second processor 109 computes the summed energy for that given row which is then stored in a second memory 111. It should be noted that the memory matrix 101 and the second memory 111 may actually comprise a single RAM memory, instead of two separate components as shown. The energy exceeding a predetermined threshold is a tentative detection. After an accumulation of 256 possible signatures comprising 19 symbols has been accumulated in the second memory 111, a third processor 113 compares the 256 energy levels to normal signature detection on a one-to-one basis, thereby cross-verifying the results of each process to arrive at the correct signature sequence received.

To account for multiple Doppler channels, an alternative embodiment resolves the channels similar to the four case approach discussed above. To account for the Doppler channels, a phase rotation is introduced. The phase rotation corrects and compensates the phase changes experienced due to Doppler spreading. For coherent detection with m Doppler channels, $m \times 4 \times 16$ hypotheses are created. The greatest of $m \times 4 \times 16$ hypotheses is selected and the corresponding signature is identified.

If a received sequence is $r(t)$, each time 19 samples $r(n\Delta t)$, $n = 1, 2, 3, \dots, 19$, are collected, four cases, $n = 1, 2, 3, \dots, 16$ (case 1), $n = 2, 3, 4, \dots, 17$ (case 2), $n = 3, 4, 5, \dots, 18$ (case 3), and $n = 4, 5, 6, \dots, 19$ (case 4) are considered. To resolve Doppler, each case is then correlated with 16 signatures with m different phase rotations corresponding to m Doppler channels. The outputs of the correlation with phase rotations are;

$$y_{ik} = \sum_{n=1}^{16} \left| r(n\Delta t) \times \bar{s}_i \times \exp(-j \bullet 2\pi f_{0k} n\Delta t) \right|^2, \text{ Equation 10}$$

where $i = 1, 2, 3, \dots, 16$; $k = 1, 2, 3, \dots, m$; $2\pi f_{0k}$ is the phase rotation of k th Doppler channel; and s_i , where $i = 1, 2, 3, \dots, 16$ are possible signatures.

An example frequency rotation of five Doppler channels is: $(f_{01}, f_{02}, f_{03}, f_{04}, f_{05}) = (-200 \text{ Hz}, -100 \text{ Hz}, 0, 100 \text{ Hz}, 200 \text{ Hz})$; with a spacing of 100 Hz in between. Each case generates $m \times 16$ hypotheses. Four cases create $m \times 16 \times 4$ hypotheses. The preamble signature with the greatest correspondence to $m \times 16 \times 4$ hypotheses is selected.

A receiver using coherent detection with multiple Doppler channels made in accordance with this embodiment of the present invention is shown in **Figures 12A-B**. In **Figure 12A**, the received RACH **77** is coupled to the matched filter **79** to correlate with a spreading code (256 chips). As discussed above, one symbol is output from the matched filter every 256 chips until nineteen symbol outputs are collected and stored in the memory matrix **101**. Sixteen consecutive symbol outputs among nineteen symbol outputs are assembled and the four cases are formed.

Each of the four sixteen consecutive sample cases is correlated in the preamble correlator **119** with each of the sixteen preamble sequences on m Doppler channels. The generated $m \times 16 \times 4$ hypotheses with are then stored in a second memory **121**. The case with the greatest energy from the $m \times 16 \times 4$ hypotheses is selected **123** and the corresponding preamble signature is identified. **Figure 12B** shows a detailed block diagram of the preamble correlator for a given preamble sequence and a given Doppler channel, (i.e., having frequency shift of f_{0k} , $k = 1 \dots m$).

An alternative embodiment of the present invention is based on the 16×16 signature matrix shown in **Figure 13**. In utilizing this embodiment of the present invention, a new signature set is created by differentially encoding the signature matrix set forth in **Figure 13**. The encoding rule is as follows. First, $S(i,k)$, $M(i,k)$ and $R(i,k)$ are defined as:

$S(i,k)$ = k th element of signature i ;

$M(i,k)$ = k th element of proposed new transmitted signature set; and

-28-

$R(i,k)$ = kth element of the proposed new replica set, to be stored in the receiver.

Then the elements are mapped as follows: map A \rightarrow 1 and B $\rightarrow j = \sqrt{-1}$, and set $M(i,0) = A = 1$ and set $R(i,0) = A = 1$. For $k = 1$ to 15 we have the following:

$$M(i,k) = M(i,k-1) \times S(i,k) \quad \text{Equation 11}$$

$$R(i,k) = S^*(i,k) \quad \text{Equation 12}$$

* denotes complex conjugate:

If $S(i,k)=1$, $R(i,k)=1$

If $S(i,k)=j$, $R(i,k)=-j$

This rule can be summarized in **Figure 14**, where the left column represents the four possible values of $M(i,k-1)$ and the top row represents the four possible values of $S(i,k)$. **Figure 15** shows an original uncoded sequence and its transformation into a differentially encoded sequence.

In the receiver, these symbols are the differentially decoded. Arbitrarily starting with $D(0)=1$, the decoded symbols $D(k)$, $k=0 \dots 15$ are given in terms of the received coded symbols $C(k)$ as:

$$D(i,k) = C(i,k) \times C(i,k-1)^* \quad \text{Equation 13}$$

The correlation against the preamble signature is then performed, whereby $\text{Sum}(i) = 0$. For $i=0$ to 15

$$\text{Sum}(i) = \text{Sum}(i) + D(i,k) \times R(i,k) \quad \text{Equation 14}$$

-29-

The full new transmitted signature set is shown in **Figure 16**. This same technique can be applied to the preamble signatures shown in **Figure 13** by replacing A by B; and B by A.

* * *

-30-

What is claimed is:

1. A method for non-coherently coding a preamble signature S_{old} , having a plurality of symbols A, for a random access channel in a CDMA communication system comprising the steps of:

a) multiplying said preamble signature S_{old} symbols A by -1 if a first
5 symbol of the preamble signature is negative;

b) translating said preamble signature S_{old} symbols A into non-coherently coded signature S_{new} symbols, where j = symbol positions greater than 1, by satisfying the conditions:

1) $S_{new}(j) = A$ if: $S_{old}(j) = S_{new}(j-1)$;

10 2) $S_{new}(j) = -A$ if: $S_{old}(j) \neq S_{new}(j-1)$; and

c) performing step b) for each consecutive symbol of the preamble signature S_{old} .

2. The method according to claim 1 wherein the preamble signature S_{new} is transmitted and detected, and said detection comprises the steps of:

a) demodulating the random access channel;

b) despreading the random access channel to obtain said preamble
5 signature S_{new} ;

c) analyzing each symbol A within said despread preamble signature S_{new} ;

-31-

- d) delaying by one symbol said despread preamble;
- e) computing a complex conjugate for said delayed preamble symbol; and
- f) multiplying said complex conjugate with said despread preamble

10 signature S_{new} .

3. A method for non-coherently coding a preamble signature for a random access channel for transmission and detection in a communication system using a code-division multiple access air interface comprising the steps of:

a) examining each consecutive symbol A of the preamble signature S_{old} ;

5 b) multiplying all said preamble signature S_{old} symbols A by -1 if a first symbol of the signature is negative;

c) using said first preamble signature S_{old} symbol for a first translated incoherently coded preamble signature S_{new} symbol;

10 d) translating said preamble signature S_{old} symbols A into incoherently coded signature S_{new} symbols where j = symbol positions greater than 1 by satisfying the conditions:

$$1) S_{new}(j) = A \text{ if: } S_{old}(j) = S_{new}(j-1);$$

$$2) S_{new}(j) = -A \text{ if: } S_{old}(j) \neq S_{new}(j-1); \text{ and}$$

15 e) performing step d) for each consecutive symbol of the preamble signature S_{old} .

4. The method according to claim 3 wherein the preamble signature S_{new} is transmitted and detected, and said detection comprises the steps of:

- a) demodulating the random access channel;
- b) despread the random access channel to obtain said preamble

20 signature S_{new} ;

- c) analyzing each symbol A within said despread preamble signature S_{new} ;
- d) delaying by one symbol said despread preamble;
- e) computing a complex conjugate for said delayed preamble symbol; and
- f) multiplying said complex conjugate with said despread preamble

25 signature S_{new} .

5. An encoding system for non-coherently coding a preamble signature for a random access channel for transmission and detection in a communication system using a CDMA air interface comprising:

means for examining each consecutive symbol A of the preamble signature

5 S_{old} ;

means for multiplying all said preamble signature S_{old} symbols A by -1 if a first symbol of the signature is negative;

means for using said first preamble signature S_{old} symbol for a first translated incoherently coded preamble signature S_{new} symbol; and

-33-

10 means for translating said preamble signature S_{old} symbols A into incoherently coded signature S_{new} symbols where j = symbol positions greater than 1 by satisfying the conditions:

$$1) S_{new}(j) = A \text{ if: } S_{old}(j) = S_{new}(j-1);$$

$$2) S_{new}(j) = -A \text{ if: } S_{old}(j) \neq S_{new}(j-1); \text{ whereby said translating means}$$

15 operates on each consecutive symbol of the preamble signature S_{old} .

6. The system of claim 5 wherein the preamble signature S_{new} is transmitted and detected, and said system further includes a detector which comprises:

a demodulator for demodulating the random access channel;

5 a despreader for despreading the random access channel to obtain said preamble signature S_{new} ;

an analyzer for analyzing each symbol A within said despread preamble signature S_{new} ;

means for delaying by one symbol said despread preamble;

means for computing a complex conjugate for said delayed preamble symbol;

10 and

a multiplier for multiplying said complex conjugate with said despread preamble signature S_{new} .

-34-

7. An encoding system for non-coherently coding a preamble signature S_{old} , having a plurality of symbols A , for a random access channel in a CDMA communication system, said encoding system comprising:

means for multiplying said preamble signature S_{old} symbols A by -1 if a first
5 symbol of the preamble signature is negative; and

means for translating said preamble signature S_{old} symbols A into non-coherently coded signature S_{new} symbols, where j = symbol positions greater than 1, by satisfying the conditions:

1) $S_{new}(j) = A$ if: $S_{old}(j) = S_{new}(j-1)$;

10 2) $S_{new}(j) = -A$ if: $S_{old}(j) \neq S_{new}(j-1)$; whereby said translating means translates each consecutive symbol of the preamble signature S_{old} .

8. The system of claim 7 wherein the preamble signature S_{new} is transmitted and detected, said system further including a complimentary detector comprising:

a demodulator for demodulating the random access channel;

means for despreading the random access channel to obtain said preamble
5 signature S_{new} ;

means for analyzing each symbol A within said despread preamble signature
 S_{new} ;

delay means for delaying by one symbol said despread preamble; and

-35-

10 a processor for computing a complex conjugate for said delayed preamble symbol and; for multiplying said complex conjugate with said despread preamble signature S_{new} .

9. A method for detecting a coded signature over a CDMA air interface where transmitting range ambiguity exists, comprising the steps of:

a) receiving at a base station a series of transmitted chips corresponding to symbols for a predetermined signature;

5 b) inputting said chips into a matched filter at the base station;

c) calculating energies for each output of said matched filter;

d) tabulating each said energy consecutively;

e) including additional energies output from said matched filter with said energies derived from said received chips to account for range ambiguity;

10 f) correlating a predefined number of consecutive energies from said tabulated additional energies and said chip derived energies with a set of predefined signature energies; and

g) repeating step f) until the transmitted signature is identified.

10. The method according to claim 9 wherein the coded signature is coherently coded.

-36-

11. The method according to claim 9 wherein the coded signature is non-coherently coded.

12. A method for detecting a coded signature, comprising a predetermined plurality of symbols, over a CDMA air interface where transmitting range ambiguity exists, the method comprising the steps of:

5 a) receiving a series of transmitted chips corresponding to said predetermined plurality of symbols;

b) inputting said chips into a matched filter;

c) storing a plurality of outputs from said matched filter, said plurality of outputs being greater in number than said plurality of symbols;

d) correlating said plurality of outputs with a set of predefined signatures; and

10 e) repeating step d) until the coded signature is identified.

13. The method according to claim 12 wherein the coded signature is coherently coded.

14. The method according to claim 12 wherein the coded signature is non-coherently coded.

-37-

15. A method for resolving range ambiguity in a received coded signature for detection in a CDMA air interface comprising the steps of:

a) computing instantaneous power for each symbol output from a matched filter for the channel;

5 b) tabulating each computed power;

d) including the power of additional symbols to account for the range ambiguity;

e) summing all of the computed powers; and

f) comparing the sum total power to a threshold.

16. A system for resolving range ambiguity in a received coded signature for detection in a CDMA air interface comprising:

a processor for computing instantaneous power for each symbol output from a matched filter for the channel, including the power of additional symbols to
5 account for the range ambiguity;

storage means for tabulating a predefined set of said computed powers; and,

means for summing the computed powers within said predefined set and comparing the sum total power to a threshold.

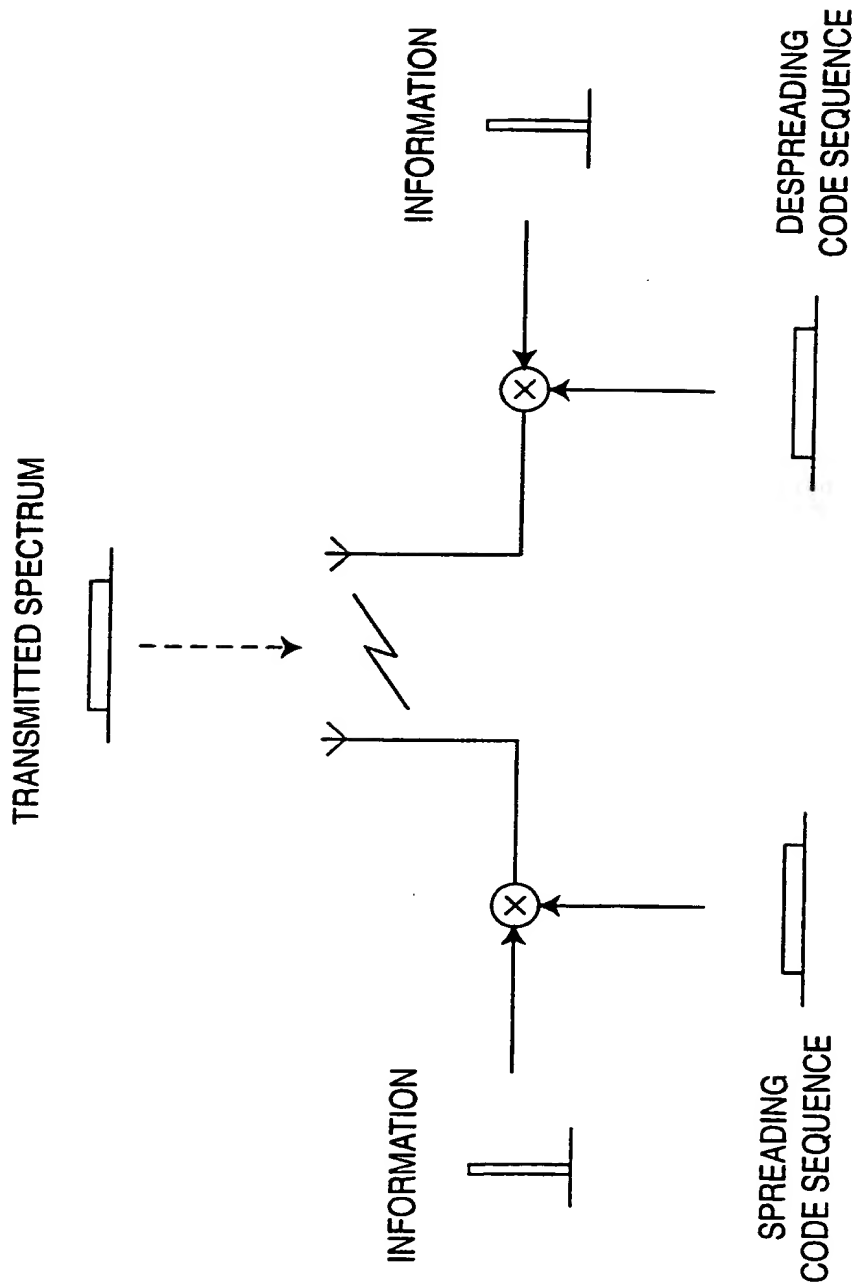


FIG. 1
PRIOR ART






2/13

PREAMBLE SYMBOLS																
SIGNATURE	P0	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15
1	A	A	A	-A	-A	-A	A	-A	-A	A	A	-A	A	-A	A	A
2	-A	A	-A	-A	A	A	A	-A	A	A	A	-A	-A	A	-A	A
3	A	-A	A	A	A	-A	A	A	-A	A	A	A	-A	A	-A	A
4	-A	A	-A	A	-A	-A	-A	-A	-A	A	-A	A	-A	A	A	A
5	A	-A	-A	-A	-A	A	A	-A	-A	-A	-A	A	-A	-A	-A	A
6	-A	-A	A	-A	A	-A	A	-A	A	-A	-A	A	A	A	A	A
7	-A	A	A	A	-A	-A	A	A	A	-A	-A	-A	-A	-A	-A	A
8	A	A	-A	-A	-A	-A	-A	A	A	-A	-A	-A	-A	-A	-A	A
9	A	-A	A	-A	-A	A	-A	A	A	A	A	A	A	A	-A	A
10	-A	A	A	-A	A	A	-A	A	-A	-A	A	A	-A	-A	A	A
11	A	A	A	A	A	A	-A	-A	A	A	-A	A	A	-A	-A	A
12	A	A	-A	A	A	A	A	A	-A	-A	-A	-A	A	A	A	A
13	A	-A	-A	A	A	-A	-A	-A	A	-A	A	-A	-A	-A	A	A
14	-A	-A	-A	A	-A	A	A	A	A	A	A	A	A	-A	A	A
15	-A	-A	-A	-A	A	-A	-A	A	-A	A	-A	-A	A	-A	-A	A
16	-A	-A	A	A	-A	A	-A	-A	-A	-A	A	-A	A	A	-A	A

73

FIG. 2
PRIOR ART

3/13

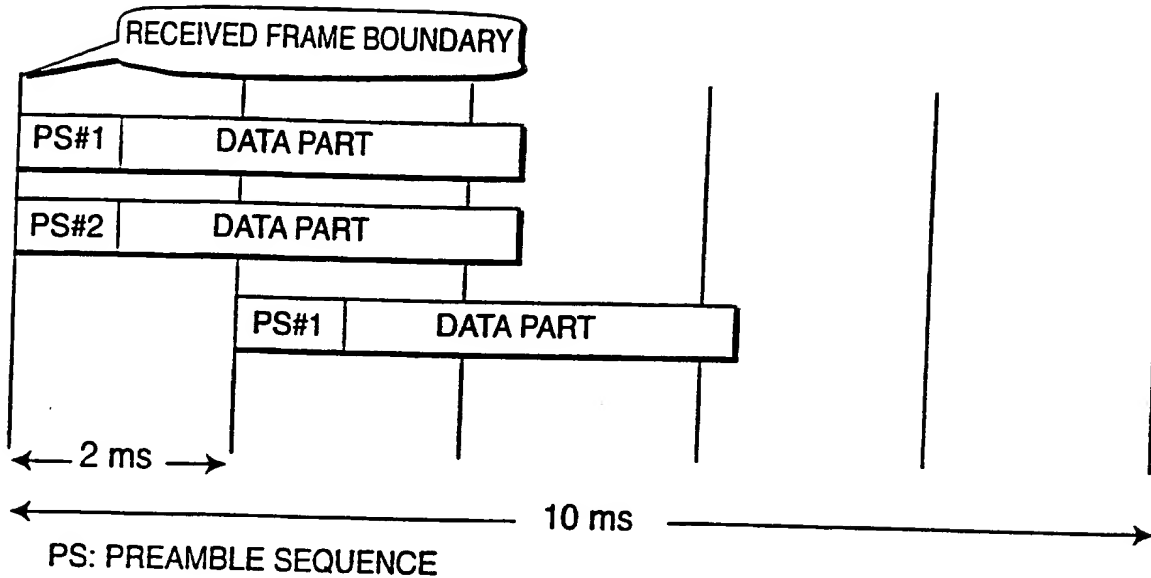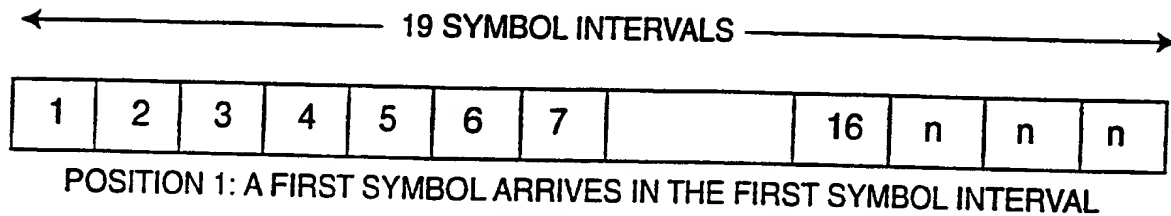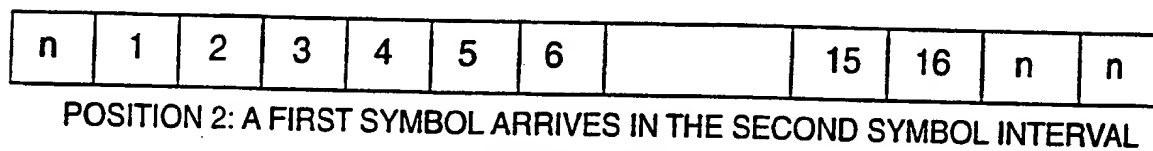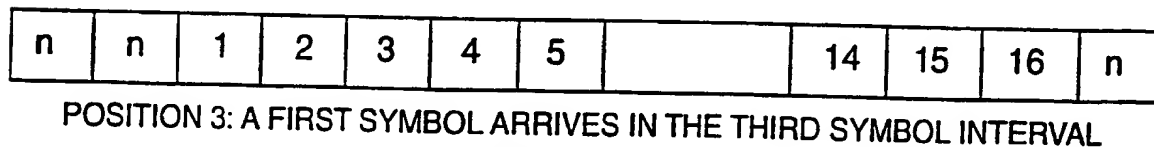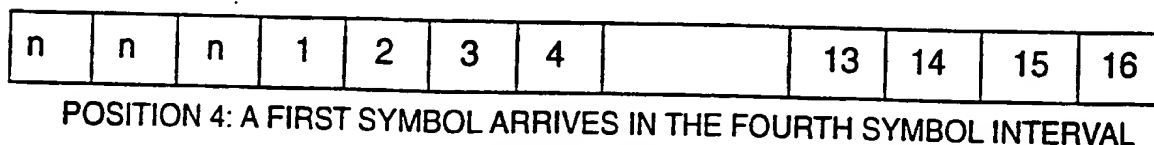**FIG. 3****FIG. 4a****FIG. 4b****FIG. 4c****FIG. 4d***SUBSTITUTE SHEET (RULE 26)*

4/13



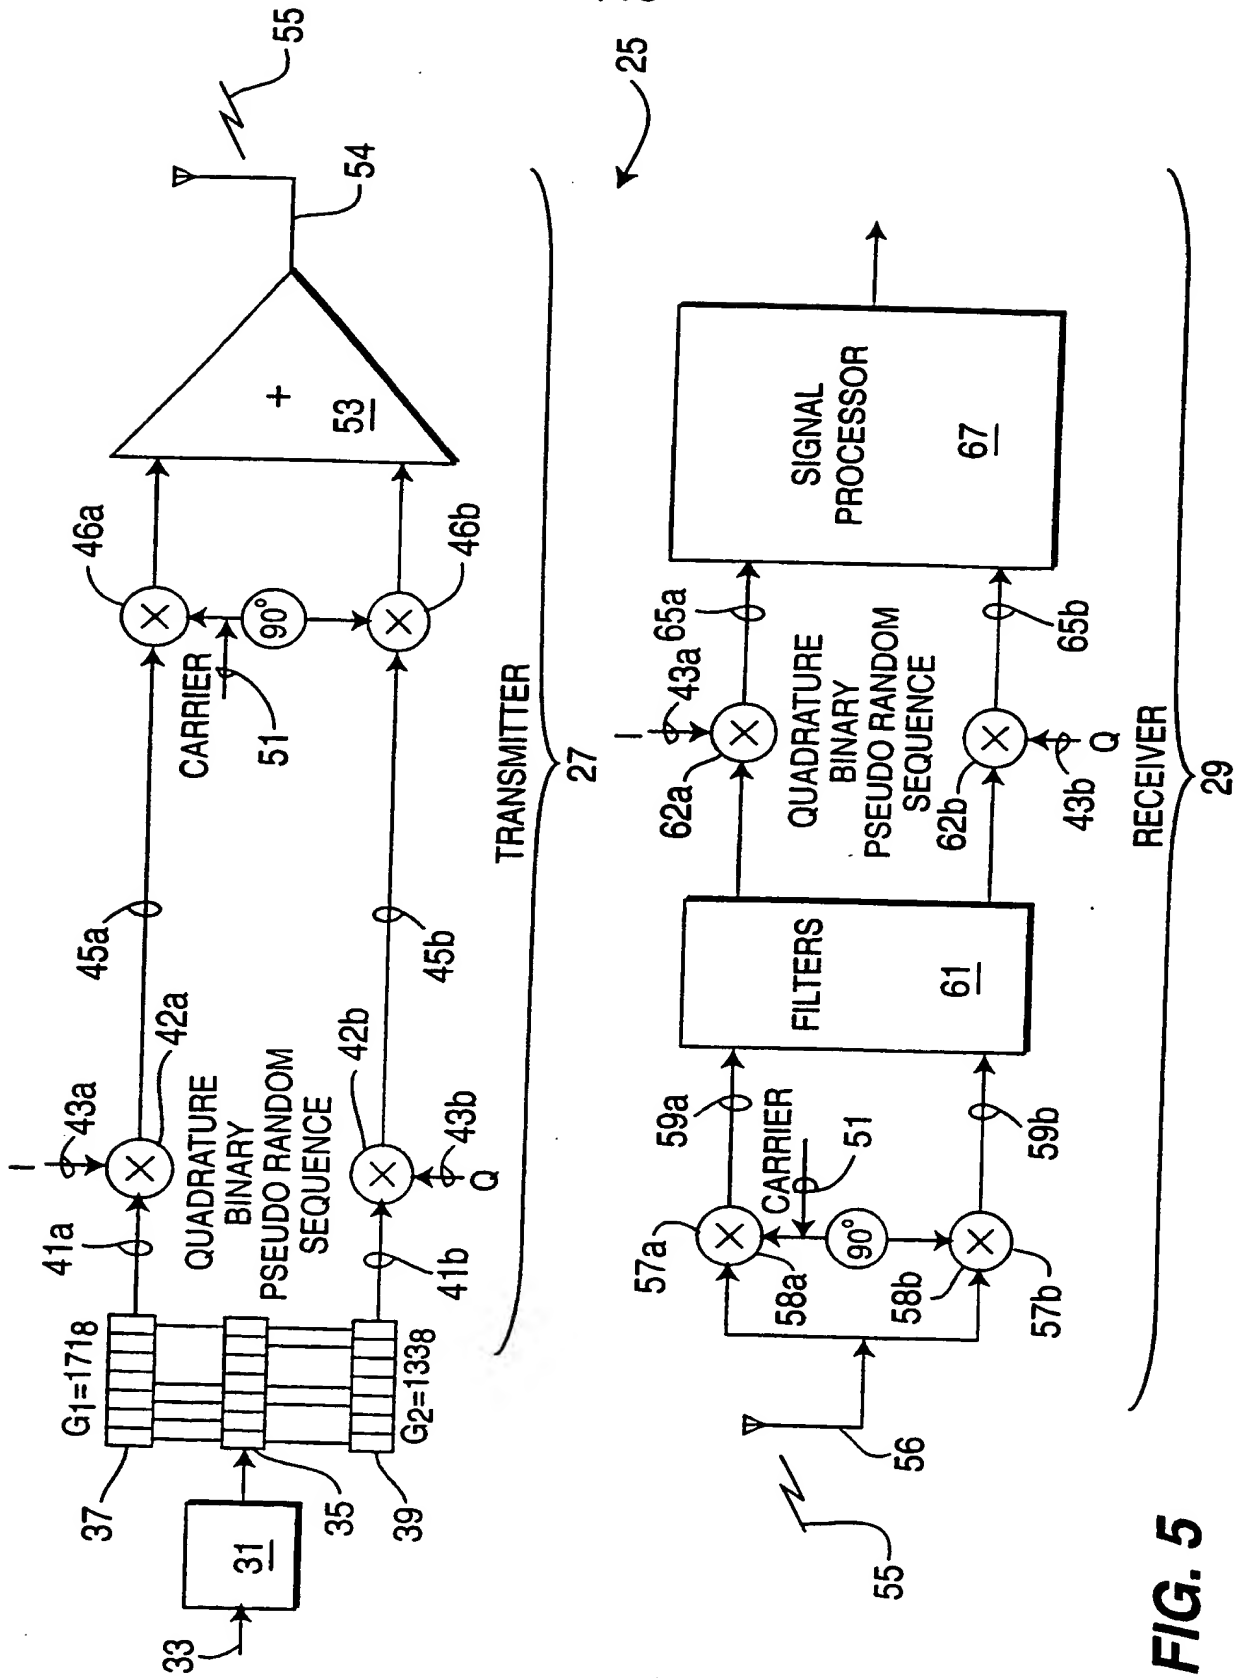


FIG. 5

5/13

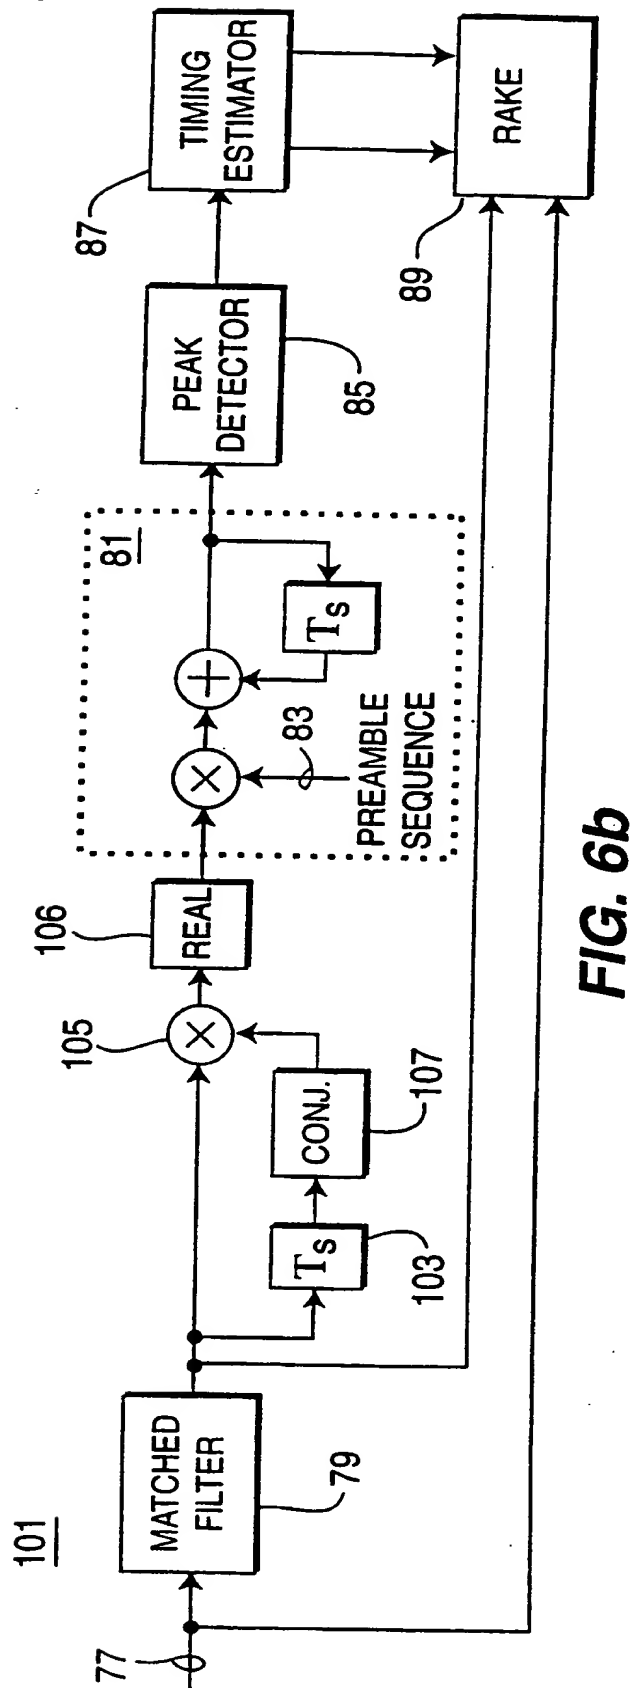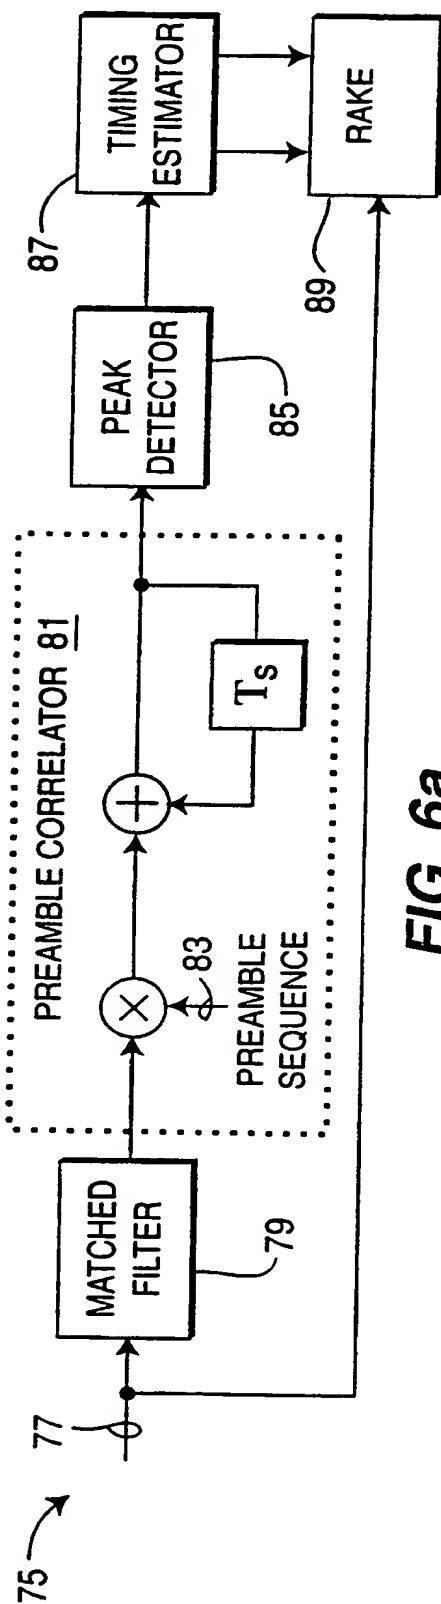


6/13

101

$$P(i, k) = Z(i, k) Z(i, k)^*$$

104

$k = 0 - 18$

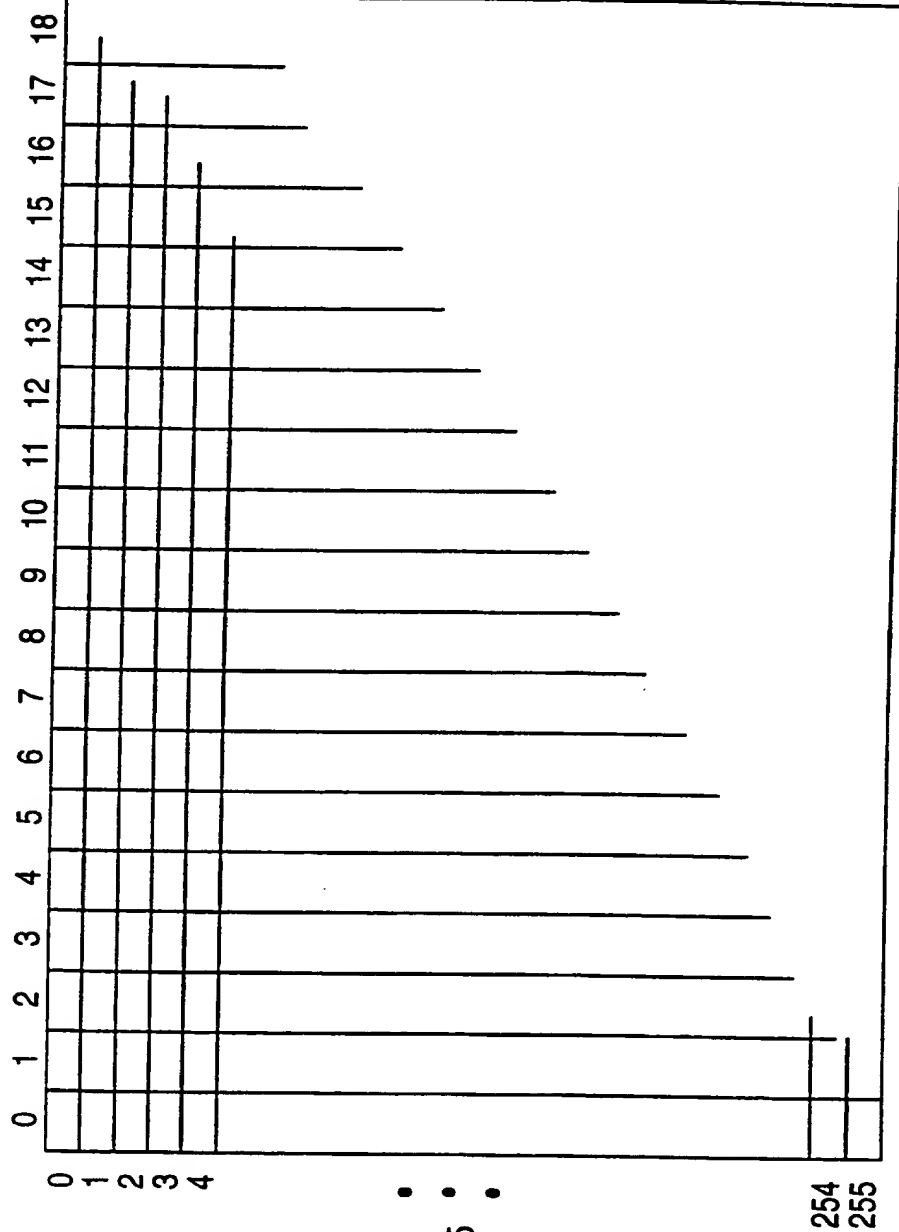


102

$i = 0 - 255$

SUM

FIG. 7a

7/13

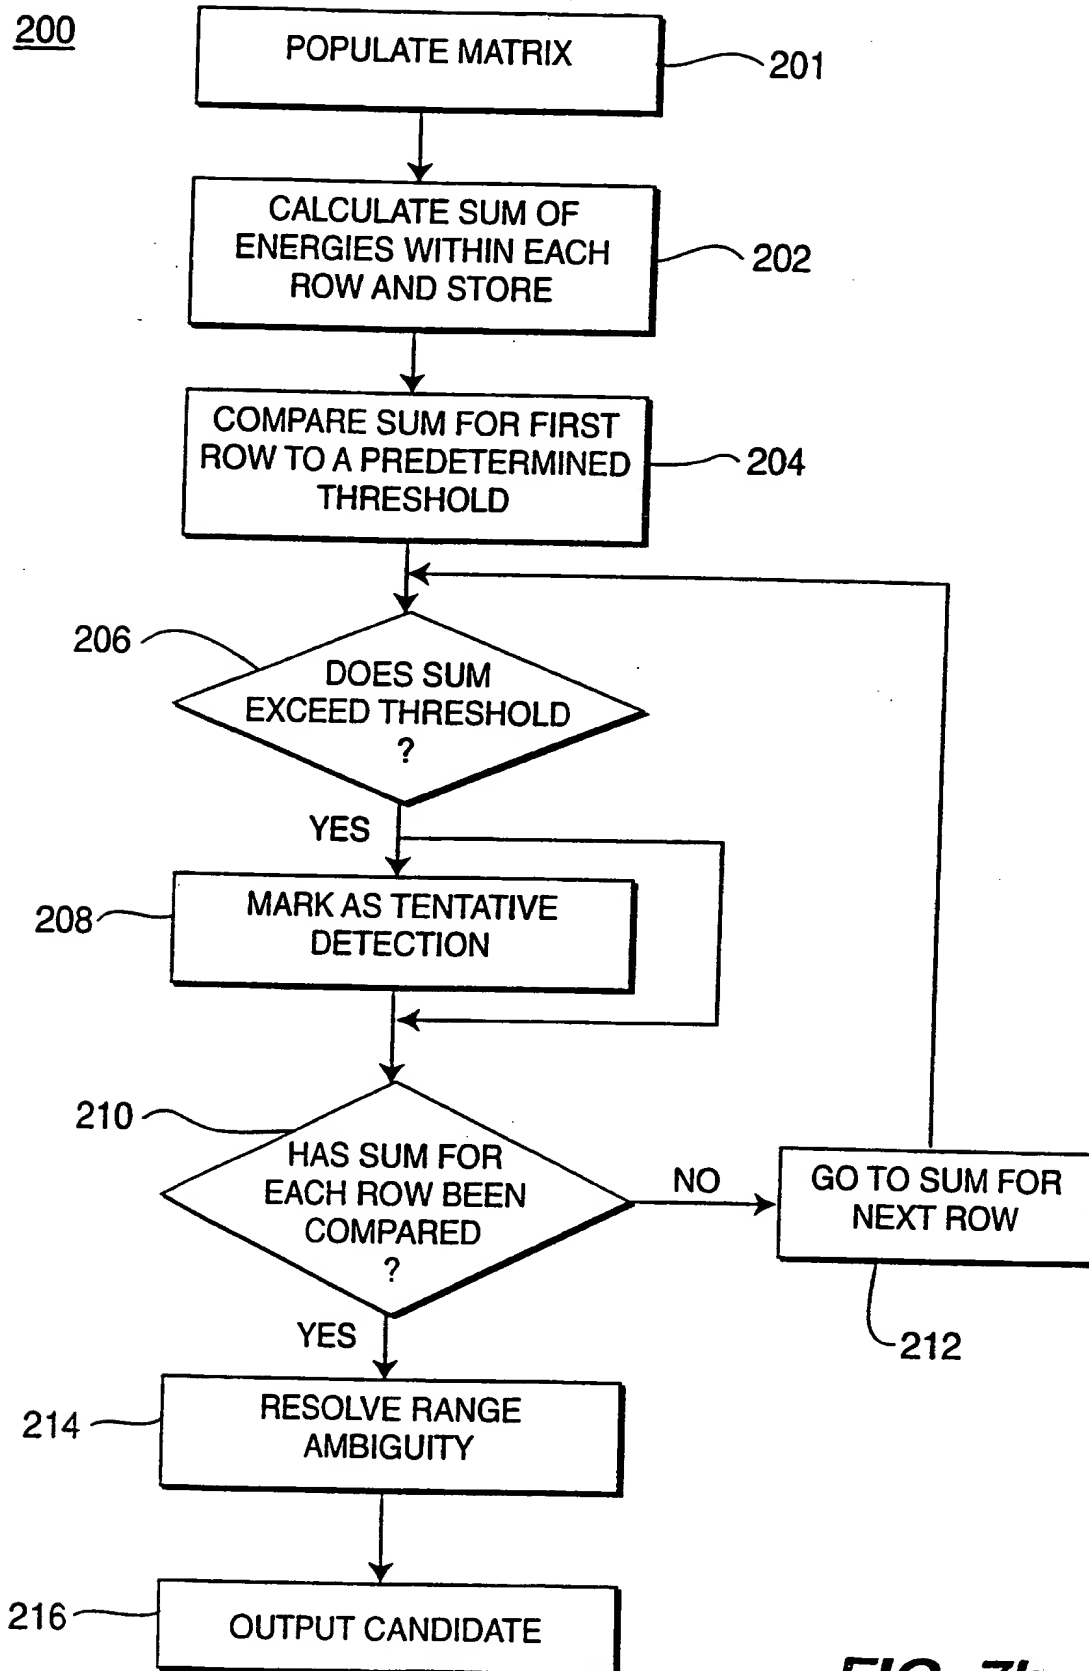200**FIG. 7b**

SUBSTITUTE SHEET (RULE 26)

8/13

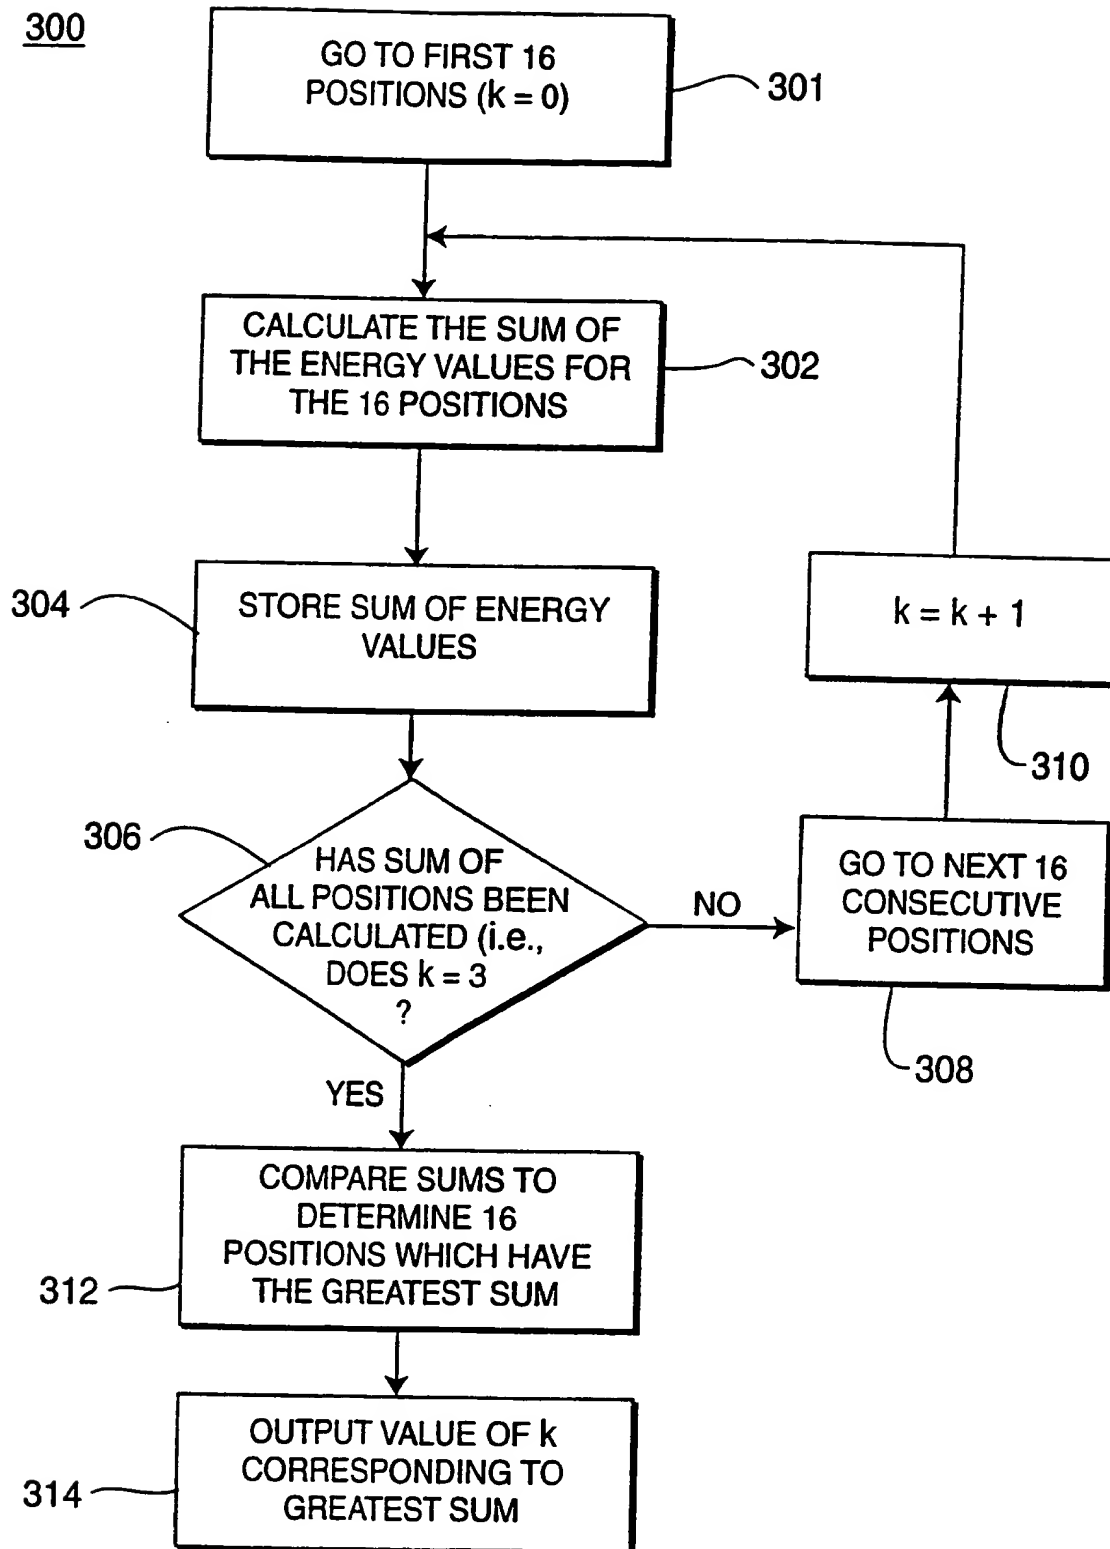
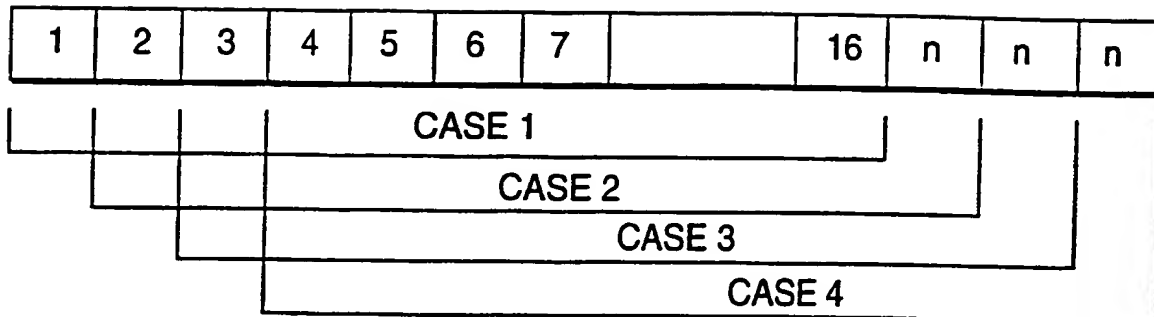


FIG. 7c

9/13

**FIG. 8**

	CASE 1	CASE 2	CASE 3	CASE 4
s1	100.00	0.39	1.56	0.39
s2	0.00	3.52	0.00	9.77
s3	0.00	9.77	0.00	3.52
s4	0.00	19.14	14.06	9.77
s5	0.00	3.52	6.25	0.39
s6	0.00	0.39	1.56	0.39
s7	0.00	9.77	6.25	0.39
s8	0.00	3.52	25.00	0.39
s9	0.00	19.14	1.56	3.52
s10	0.00	0.39	1.56	9.77
s11	0.00	3.52	6.25	3.52
s12	0.00	0.39	1.56	0.39
s13	0.00	0.39	14.06	9.77
s14	0.00	0.39	1.56	19.14
s15	0.00	9.77	6.25	9.77
s16	0.00	9.77	0.00	0.39

FIG. 9

SUBSTITUTE SHEET (RULE 26)

10/13

	PREAMBLE SYMBOLS															
SIGNATURE	P0	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15
1	A	A	A	-A	A	-A	-A	A	-A	-A	-A	A	A	-A	-A	-A
2	A	-A	-A	-A	A	-A	A	A	-A	A	-A	-A	-A	A	A	-A
3	A	-A	-A	-A	-A	A	A	A	-A	-A	-A	-A	A	A	-A	-A
4	A	-A	-A	A	A	A	A	A	A	-A	-A	A	A	-A	A	-A
5	A	-A	A	-A	A	A	A	-A	A	-A	A	A	-A	A	-A	-A
6	A	A	-A	-A	A	A	-A	-A	A	A	A	-A	A	-A	A	-A
7	A	-A	A	-A	-A	-A	A	-A	A	A	A	A	A	A	A	-A
8	A	A	-A	A	-A	A	-A	-A	-A	A	A	A	A	A	-A	-A
9	A	-A	-A	A	-A	-A	A	A	A	A	-A	A	-A	-A	-A	-A
10	A	-A	A	A	-A	A	A	-A	-A	-A	A	-A	-A	-A	A	-A
11	A	A	A	A	A	A	-A	A	A	A	-A	-A	-A	A	-A	-A
12	A	A	-A	-A	-A	-A	-A	-A	A	-A	A	-A	-A	-A	-A	-A
13	A	-A	A	A	A	-A	A	-A	-A	A	A	-A	A	-A	-A	-A
14	A	A	A	-A	-A	A	-A	A	-A	A	-A	-A	A	-A	A	-A
15	A	A	A	A	-A	-A	-A	A	A	-A	-A	-A	-A	A	A	-A
16	A	A	-A	A	A	-A	-A	-A	-A	-A	A	A	-A	A	A	-A

97

FIG. 10

11/13

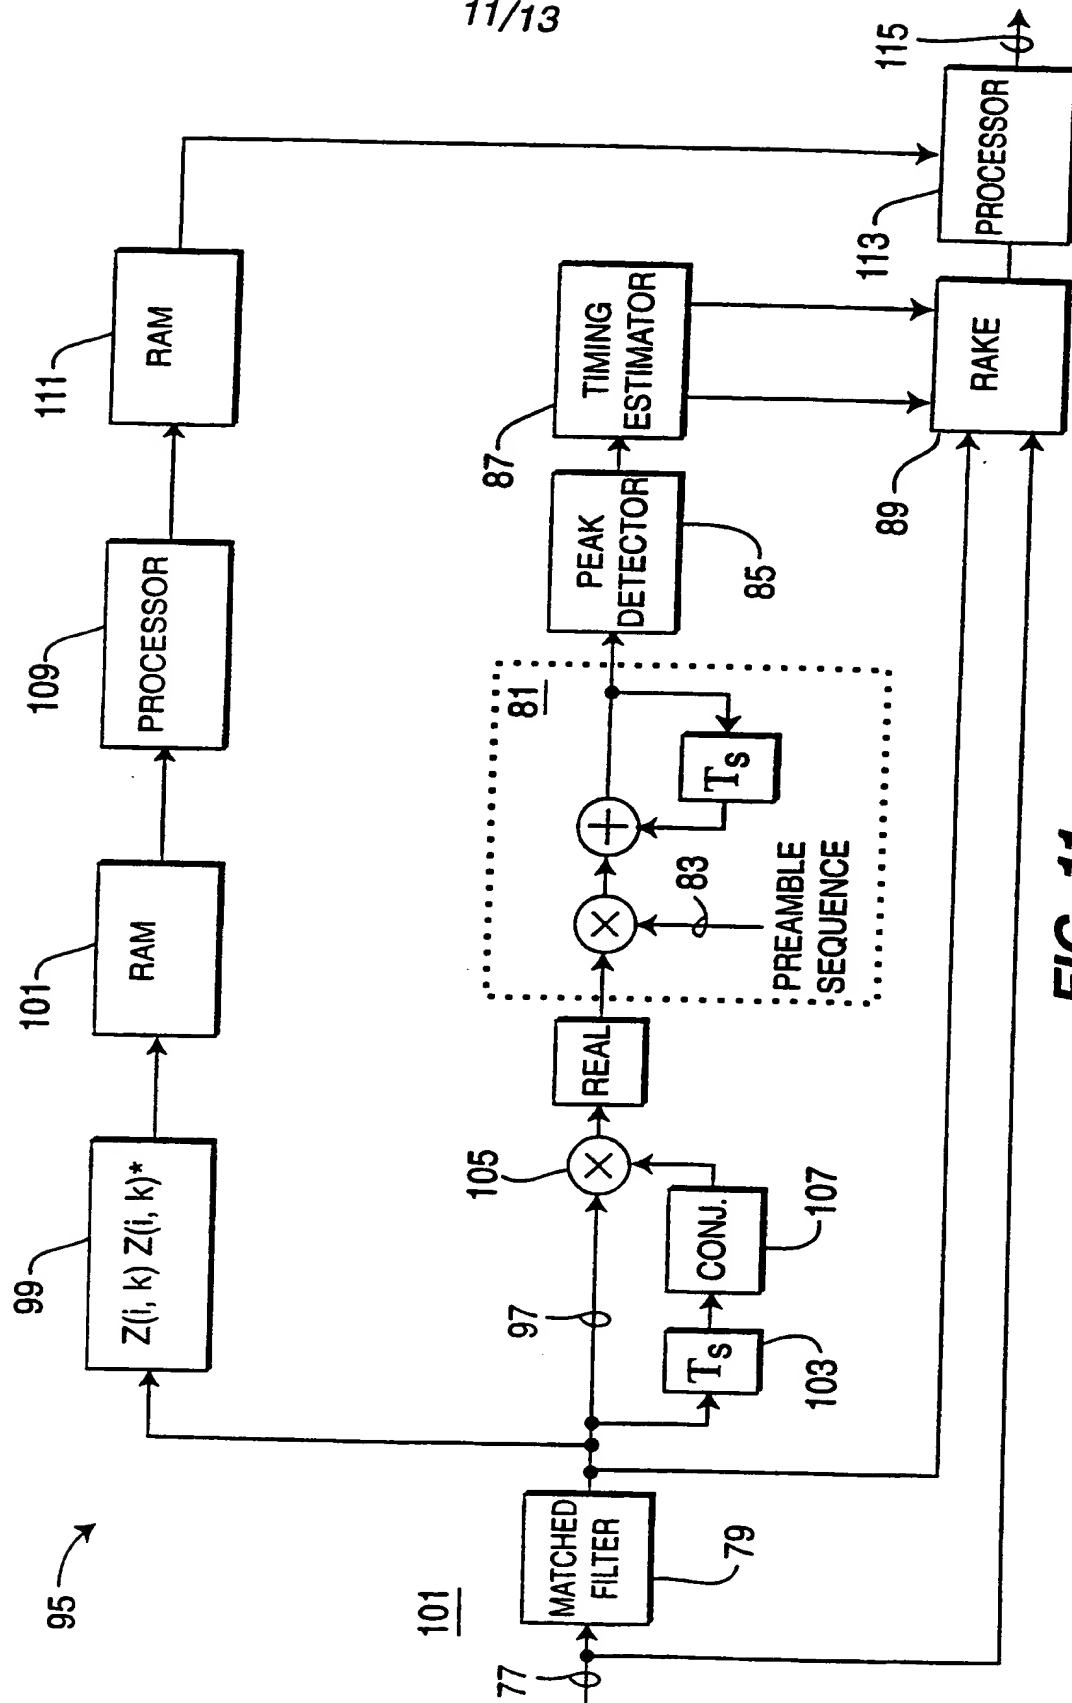
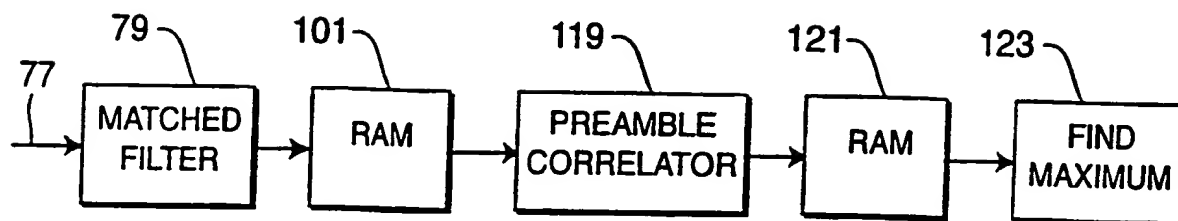
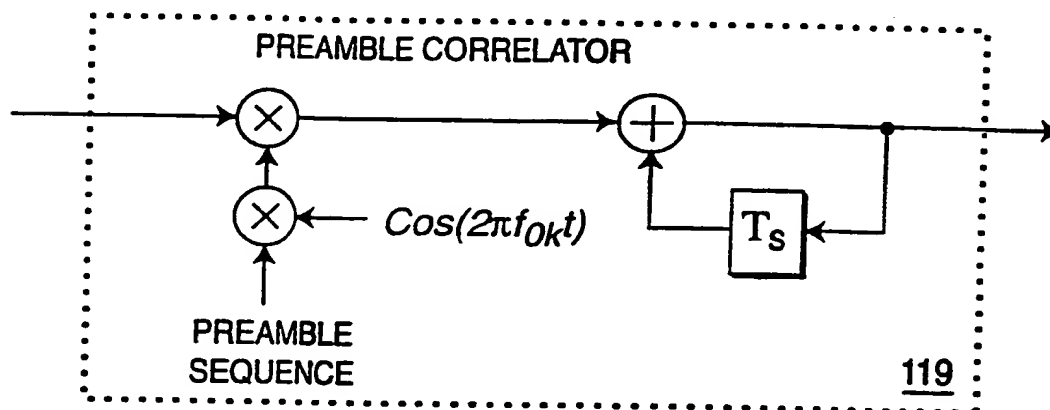


FIG. 11

SUBSTITUTE SHEET (RULE 26)

12/13

**FIG. 12a****FIG. 12b**

k	0...255... <div>...4095</div>															
$S(0,k)$	A	A	B	B	A	-A	-B	B	A	-A	B	-B	A	A	-B	-B
$S(1,k)$	A	A	B	B	A	-A	-B	B	-A	A	-B	B	-A	-A	B	B
$S(2,k)$	A	-A	B	-B	A	A	-B	-B	A	A	B	B	A	-A	-B	B
$S(3,k)$	A	-A	B	-B	A	A	-B	-B	-A	-A	-B	-B	-A	A	B	-B
$S(4,k)$	A	A	B	B	-A	A	B	-B	A	-A	B	-B	-A	-A	B	B
$S(5,k)$	A	A	B	B	-A	A	B	-B	-A	A	-B	B	A	A	-B	-B
$S(6,k)$	A	-A	B	-B	-A	-A	B	B	A	A	B	B	-A	A	B	-B
$S(7,k)$	A	-A	B	-B	-A	-A	B	B	-A	-A	-B	-B	A	-A	-B	B
$S(8,k)$	A	A	-B	-B	A	-A	B	-B	A	-A	-B	B	A	A	B	B
$S(9,k)$	A	A	-B	-B	A	-A	B	-B	-A	A	B	-B	-A	-A	-B	-B
$S(10,k)$	A	-A	-B	B	A	A	B	B	A	A	-B	-B	A	-A	B	-B
$S(11,k)$	A	-A	-B	B	A	A	B	B	-A	-A	B	B	-A	A	-B	B
$S(12,k)$	A	A	-B	-B	-A	A	-B	B	A	-A	-B	B	-A	-A	-B	-B
$S(13,k)$	A	A	-B	-B	-A	A	-B	B	-A	A	B	-B	A	-A	B	B
$S(14,k)$	A	-A	-B	B	-A	-A	-B	-B	A	A	-B	-B	-A	A	-B	B
$S(15,k)$	A	-A	-B	B	-A	-A	-B	-B	-A	-A	B	B	A	-A	B	-B

FIG. 13

SUBSTITUTE SHEET (RULE 26)

13/13

		$S(i,k)$			
$M(i,k-1)$		A	-A	B	-B
	A	A	-A	$B = jA$	$-B = -jA$
	-A	-A	A	$-B = -jA$	$B = jA$
	B	$B = jA$	$-B = -jA$	-A	A
	-B	$-B = -jA$	$B = jA$	A	-A

FIG. 14

ORIG.	A	-A	B	-B	A	A	-B	-B	A	A	B	B	A	-A	-B	B
CODED	A	-A	-jA	-A	-A	-A	jA	A	A	A	jA	-A	-A	A	-jA	A

FIG. 15

k	0...255...															
$S(0,k)$	A	A	B	-A	-A	A	-B	A	A	-A	-B	-A	-A	-A	B	A
$S(1,k)$	A	A	B	-A	-A	A	-B	A	-A	-A	B	-A	A	-A	-B	A
$S(2,k)$	A	-A	-B	-A	-A	-A	B	A	A	A	B	-A	-A	A	-B	A
$S(3,k)$	A	-A	-B	-A	-A	-A	B	A	-A	A	-B	-A	A	A	B	A
$S(4,k)$	A	A	B	-A	A	A	B	A	A	-A	-B	-A	A	-A	-B	A
$S(5,k)$	A	A	B	-A	A	A	B	A	-A	-A	B	-A	-A	-A	B	A
$S(6,k)$	A	-A	-B	-A	A	-A	-B	A	A	A	B	-A	A	A	B	A
$S(7,k)$	A	-A	-B	-A	A	-A	-B	A	-A	A	-B	-A	-A	A	-B	A
$S(8,k)$	A	A	-B	-A	-A	A	B	A	A	-A	B	-A	-A	-A	-B	A
$S(9,k)$	A	A	-B	-A	-A	A	B	A	-A	-A	-B	-A	A	-A	B	A
$S(10,k)$	A	-A	B	-A	-A	-A	-B	A	A	A	-B	-A	-A	A	B	A
$S(11,k)$	A	-A	B	-A	-A	-A	-B	A	-A	A	B	-A	A	A	-B	A
$S(12,k)$	A	A	-B	-A	A	A	-B	A	A	-A	B	-A	A	-A	B	A
$S(13,k)$	A	A	-B	-A	A	A	-B	A	-A	-A	-B	-A	-A	-A	-B	A
$S(14,k)$	A	-A	B	-A	-A	-A	B	A	A	A	-B	-A	A	A	-B	A
$S(15,k)$	A	-A	B	-A	-A	-A	B	A	-A	A	B	-A	A	A	B	A

FIG. 16

SUBSTITUTE SHEET (RULE 26)



(43) International Publication Date
22 June 2000 (22.06.2000)


PCT

(10) International Publication Number
WO 00/36761 A3

- (51) **International Patent Classification⁷:** **H04B 1/707,**
H04J 13/00
- (21) **International Application Number:** PCT/US99/29504
- (22) **International Filing Date:**
14 December 1999 (14.12.1999)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
60/112,299 14 December 1998 (14.12.1998) US
60/116,284 19 January 1999 (19.01.1999) US
60/125,418 22 March 1999 (22.03.1999) US
60/129,177 14 April 1999 (14.04.1999) US
- (71) **Applicant (for all designated States except US):** **INTER-DIGITAL TECHNOLOGY CORPORATION** [US/US];
Suite 527, 300 Delaware Avenue, Wilmington, DE 19801
(US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **DICK, Stephen,**
G. [US/US]; 61 Bobann Drive, Nesconset, NY 11767
(US). **DENNEAN, Charles** [US/US]; 53 Vermont Street,
Melville, NY 11747 (US). **ZEIRA, Eldad** [US/US]; 8 Old
Oak Road, Trumbull, CT 06611 (US). **PAN, Jung-Lin**
[—/US]; 31 Oneida Avenue, South Setauket, NY 11720
(US). **SHIN, Sung-Hyuk** [KR/US]; 1531 8th Street, Fort
Lee, NJ 07024 (US). **ZEIRA, Ariela** [US/US]; 8 Old Oak
Road, Trumbull, CT 06611 (US).
- (74) **Agents:** **VOLPE, Anthony, S.** et al.; Volpe and Koenig,
P.C., Suite 400, One Penn Center, 1617 John F. Kennedy
Boulevard, Philadelphia, PA 19103 (US).
- (81) **Designated States (national):** AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,
DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,
LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO,
RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG,
US, UZ, VN, YU, ZA, ZW.
- (84) **Designated States (regional):** ARIPO patent (GH, GM,
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LI, LU,

[Continued on next page]

- (54) Title:** RANDOM ACCESS CHANNEL PREAMBLE DETECTION

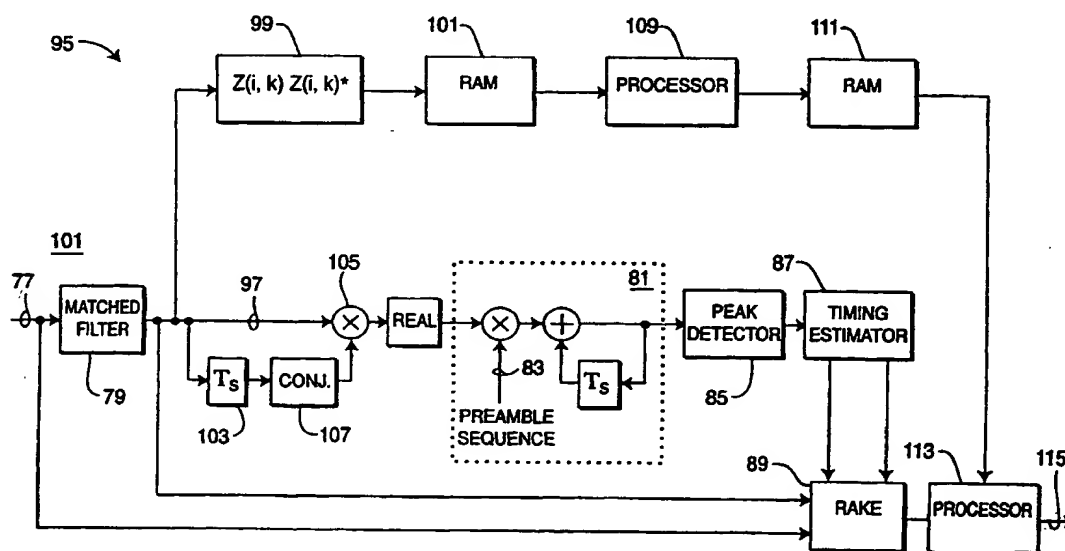

- (57) Abstract:** The present invention relates to a detector that detects a transmitted digital signature using the energy output from a matched filter. The energies are tabulated according to an anticipated signature pattern for variable transmission distances. The tabulation accounts for expected round trip transmission delays and allows processing of the accumulated symbols to derive a correct signature whether coherent or non-coherent signature coding is used and multiple Doppler channels are present.



MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
30 November 2000

Published:

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

Int. .ional Application No

PCT/US 99/29504

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04B1/707 H04J13/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 H04J H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 378 417 A (AGILIS CORP) 18 July 1990 (1990-07-18) column 6, line 1 -column 7, line 5 ---	1-8
A	GERANIOTIS E A ET AL: "Performance of noncoherent direct-sequence spread-spectrum communications over specular multipath fading channels" IEEE TRANSACTIONS ON COMMUNICATIONS, MARCH 1986, USA, vol. COM-34, no. 3, pages 219-226, XP002140478 ISSN: 0090-6778 abstract page 687, left-hand column, line 1 -right-hand column, line 2 page 688, left-hand column, line 1 - line 41 --- -/--	1-8

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

29 September 2000

Date of mailing of the international search report

12 10 2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Larcinese, A

INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/US 99/29504

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 696 762 A (OHLSON JOHN ET AL) 9 December 1997 (1997-12-09) column 1, line 57 - line 63 column 2; line 18 - line 49 column 4, line 30 -column 5, line 49 ---	9-16
A	WO 98 49859 A (QUALCOMM INC) 5 November 1998 (1998-11-05) page 2, line 11 -page 3, line 5 page 6, line 6 - line 36 -----	9-16

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 99/29504

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-8

Method and system for non-coherently coding a preamble signature in a CDMA system.

2. Claims: 9-16

Method and system for detecting a coded signature over a CDMA interface taking into account range ambiguity in transmission

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/29504

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0378417	A	18-07-1990	US 4930140 A	29-05-1990
			CA 2007554 A	13-07-1990
			JP 2290344 A	30-11-1990
US 5696762	A	09-12-1997	AU 713533 B	02-12-1999
			AU 2533097 A	17-10-1997
			CA 2248647 A	02-10-1997
			EP 0883936 A	16-12-1998
			WO 9736383 A	02-10-1997
WO 9849859	A	05-11-1998	AU 7161198 A	24-11-1998